



## Insert Panel (INS)


A fixed unit that can be directly and permanently fitted to a primary window or door. Alternatively, this unit can be fitted with turn button releases to enable removal for cleaning and maintenance.



Removable section with turn button



Fixed section

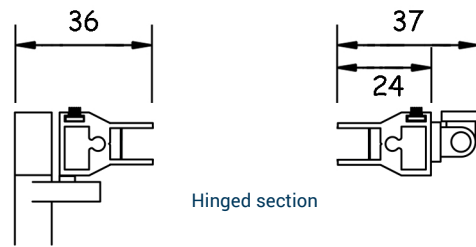

Hinged section

### Features

- Slim, unobtrusive aluminium profile
- Most economical secondary system in the range
- Quick and simple installation
- Improved noise and thermal insulation
- Enhanced security
- Suitable for arched, shaped and bespoke application
- Ideal for use where space is limited - i.e. behind shutter

### Variations of Basic Unit

- Removable with the use of small light weight turn buttons
- Variety of stock colours

### Specification

- Glazing options: 4mm - 6.8mm
- 16mm x 24mm aluminium section - no timber subframe
- Pre-drilled for face fix only
- Woolpile inserted in to panel section groove to create outer frame seal
- Gasket colour option of black or white
- Standard colour white high gloss - RAL 9910

Traditional  
Configurations

INS



Based on 4mm Glass

Based on 4mm Glass

Max width: 1,200mm  
or Max height: 2,000mm